

CHALKBOARD PANEL: WALL MOUNT

PRODUCT NUMBER  
NI-PG-301-02

LAYOUT PLAN

PAGE 1 OF 1	SCALE @ 8.5x11 1:25	DRAWN PR	CHECKED LL	PHONE NUMBER: 1-877-733-7456
----------------	------------------------	-------------	---------------	---------------------------------

## COMPONENTS


NATURE'S INSTRUMENTS NI-PG-30I-02 CHALKBOARD PANEL: WALL MOUNTED . NI PACKAGE INCLUDES:

- 89 x 89mm [4"x4"] CEDAR POST: x 2
- PRE-ASSEMBLED CHALKBOARD PANEL: x 1
- FRAMED IN CEDAR TRIM
- PRE-ASSEMBLED CEDAR BASE-T': x 1
- 38 x 140mm [2"x6"] CEDAR CAP: x 1
- 64mm [2 1/2"] BROWN DECK SCREWS: x 36
- 25mm [1"] Ø CEDAR PLUGS x 8

5 x 83mm [3/16" x 3 1/4"] HEX HEAD TAP CON FASTENERS: x 8 (OR SIMILAR, AS APPROPRIATE FOR SPECIFIC WALL MATERIALS) ARE NOT SUPPLIED.

## PANEL INSTALLATION

1. FASTEN THE POSTS TO EACH SIDE OF THE CHALKBOARD PANEL USING SUPPLIED SCREWS FASTENED THROUGH PRE-DRILLED HOLES IN THE PANEL FRAME (FRONT & BACK).
  - 1a. TOP OF POSTS TO BE FLUSH WITH TOP OF FRAME.
2. FASTEN THE BASE-T' TO THE BOTTOM OF THE PANEL USING SUPPLIED SCREWS THROUGH PRE-DRILLED HOLES IN THE PANEL FRAME (FRONT & BACK).
  - 2a. BASE-T' TO BE PLACED TIGHT TO THE WALL BEHIND AND TO BE FLUSH WITH FINISHED SURFACE.
3. FASTEN CAP TO THE TOP OF THE PANEL USING SUPPLIED SCREWS THROUGH PRE-DRILLED HOLES IN THE PANEL FRAME (FRONT & BACK).
  - 3a. CAP TO BE PLACED TIGHT TO THE WALL BEHIND.
4. FINISHED SURFACE AROUND THE PANEL MUST BE LEVEL FOR THE ENTIRE LENGTH OF THE PANEL.
5. PLACE PANEL WITH ATTACHED POSTS AGAINST A WALL.
6. LEVEL PANEL LEFT TO RIGHT.
7. FASTEN PANEL TO THE WALL USING TAP CON FASTENERS (OR SIMILAR, AS APPROPRIATE FOR SPECIFIC WALL MATERIALS) THROUGH PRE-DRILLED, COUNTERSUNK HOLES IN POSTS.
  - 7a. FOLLOW MANUFACTURER'S RECOMMENDATIONS FOR FASTENER INSTALLATION.
  - 7b. FASTENERS MUST HAVE A MIN EMBEDMENT OF 32mm [1 1/4"].
8. INSTALL CEDAR PLUGS
  - 8a. ENSURE PLUGS ARE FLUSH TO POST FINISH.

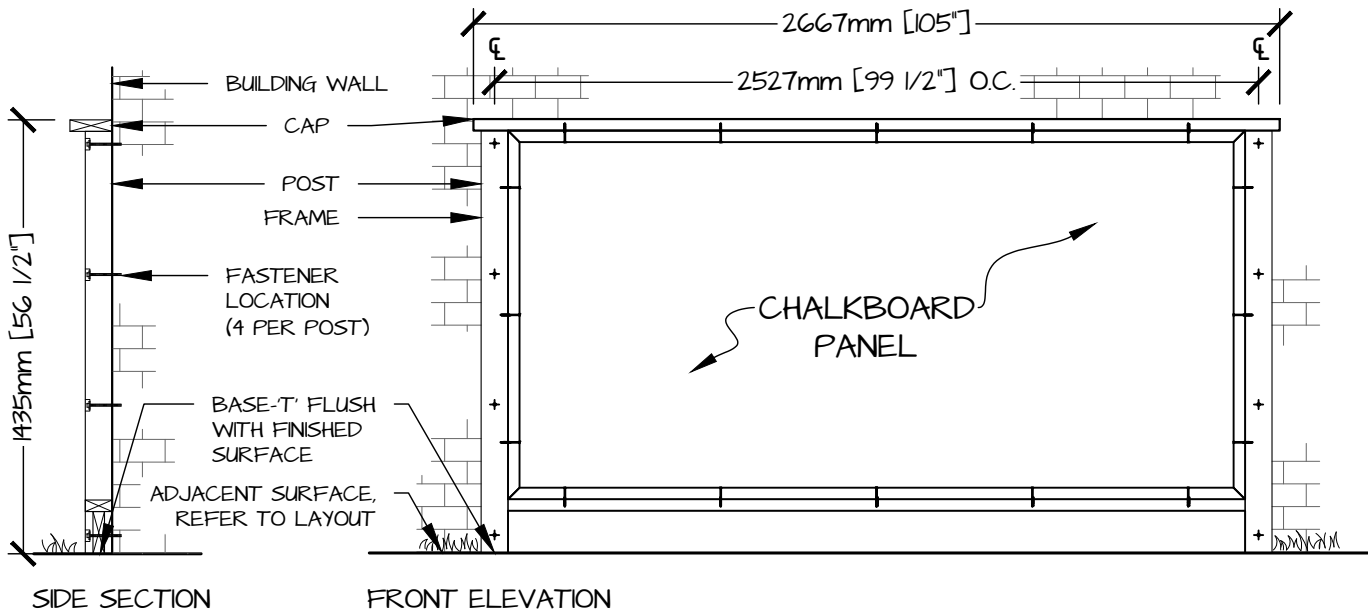

## CHALKBOARD PANEL: WALL MOUNT

PRODUCT NUMBER  
NI-PG-30I-02

PAGE	SCALE @ 85x11	DRAWN	CHECKED	PHONE NUMBER:
1 OF 1	1:30	PR	LL	1-877-733-7456