

COMPONENTS

NATURE'S INSTRUMENTS NI-PG-605-05 300mm [12"] Ø BARRIER-FREE LOG BORDER WITH 915mm [36"] OPENING.

NI PACKAGE INCLUDES-



- PRE-MITERED HARDWOOD BARRIER-FREE HORIZONTAL LOG BORDER: x 1 (IF A TO-SCALE LAYOUT PLAN IS PROVIDED)
- 254mm [10"] FASTENER: x 2

GRANULAR BASE COURSE, GEOTEXTILE AND ADJACENT LOG BORDERS ARE NOT SUPPLIED.

NOTE: WHEN PLACING THE ORDER, A TO-SCALE LAYOUT PLAN MUST BE PROVIDED TO ENABLE ACCURATE MITER CUTS.

NOTES

1. POSITION BARRIER-FREE LOG BORDER ACCORDING TO THE LAYOUT PLAN.
2. BORDER LOGS SHOULD REMAIN 2/3 EXPOSED ABOVE FINISHED GRADE.
3. BARRIER-FREE OPENING TO BE 20mm [3/8"] ABOVE ADJACENT FINISHED SURFACE.
4. IF BORDER LOGS ARE USED TO RETAIN A LOOSE FILL MATERIAL GEOTEXTILE IS TO BE INSTALLED UNDER THE BORDER LOG AND CONTINUE UNDER THE LOOSE FILL MATERIAL TO PREVENT ACCESS TO THE BORDER BASE OR THE TERRA-FIRMA UNDER THE LOG BORDER.
- 4.1 FILTER FABRIC TO BE NILEX 4535 NON-WOVEN GEO-TEXTILE, OR APPROVED EQUAL.
5. LOG BORDER MAY BE INSTALLED DIRECTLY ON TERRA-FIRMA, IF THE GROUND IS A FREE-DRAINING MATERIAL.
6. GRANULAR BASE COURSE TO BE 150mm [6"] MIN DEPTH OF CRUSHED GRAVEL (OR 3/4" CLEAR GRAVEL) COMPACTED TO 98% S.P.D.D.
7. POSITION LOGS ACCORDING TO THE LETTER LABELING (MATCH LETTERS).
8. LINE UP MITERED JOINTS. MITERS ARE TO HAVE A GAP NO LARGER THAN 15mm [1/2"]
6. FASTEN MITERS TOGETHER WITH SUPPLIED FASTENERS IN PRE-DRILLED, COUNTERSUNK HOLES

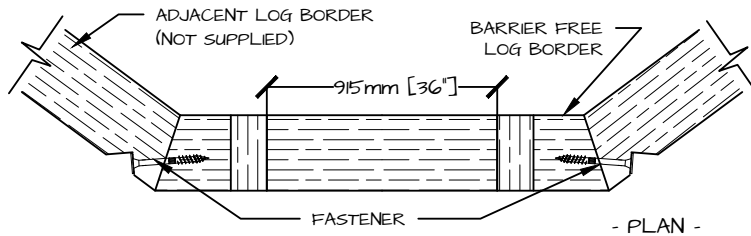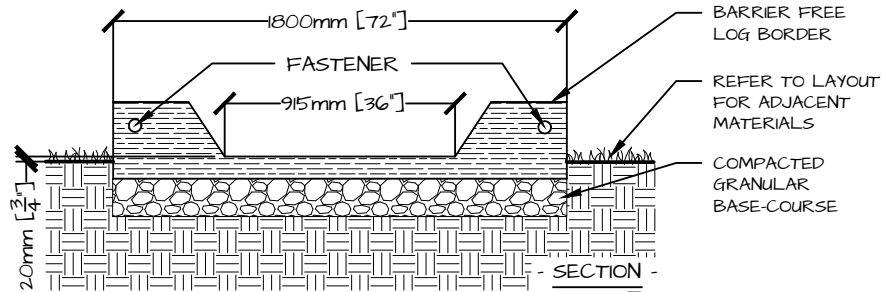

DETAIL

300mm [12"] Ø BARRIER-FREE LOG BORDER WITH 915mm [36"] OPENING


PRODUCT NUMBER	PAGE	SCALE @ .05X	DRAWN	CHECKED	PHONE NUMBER
NI-PG-605-05	1 OF 1	N.T.S.	RI	SE	1-877-733-7459

BLOCK INSTRUCTIONS:

- THE BLOCK IS 1800mm [72"] WHICH CORRESPONDS TO THE MINIMUM REQUIRED LENGTH OF THE BARRIER FREE LOG TO ALLOW FOR A 915mm [36"] BARRIER FREE SECTION CAPABLE OF BEING MITERED.

LAYOUT INSTRUCTIONS:

- ON LAYOUT ADD LINES TO INDICATE MITER LOCATION
- THE ANGLE OF MITERS MAY VARY
- ON LAYOUT INDICATE ANGLES AND LENGTHS OF EACH LOG
- PROVIDE NATURE'S INSTRUMENTS WITH AN AUTOCAD FILE OF THE BORDER LAYOUT OR AN ACCURATE HAND DRAWING. NATURE'S INSTRUMENTS WILL PRE-ASSEMBLE AND PRE-MITER ALL LOGS ACCORDING TO THE DRAWING AND SHIP WITH EACH LOG LABELED FOR EASY INSTALLATION ON SITE.



DETAIL

300mm [12"] Ø BARRIER-FREE LOG BORDER WITH 915mm [36"] OPENING - LAYOUT

PRODUCT NUMBER	PAGE	SCALE @ 0.5X	DRAWN	CHECKED	PHONE NUMBER
NI-PG-605-05	1 OF 1	N.T.S.	RI	SE	1-877-733-7459